

E2 HARDWARE SYSTEM



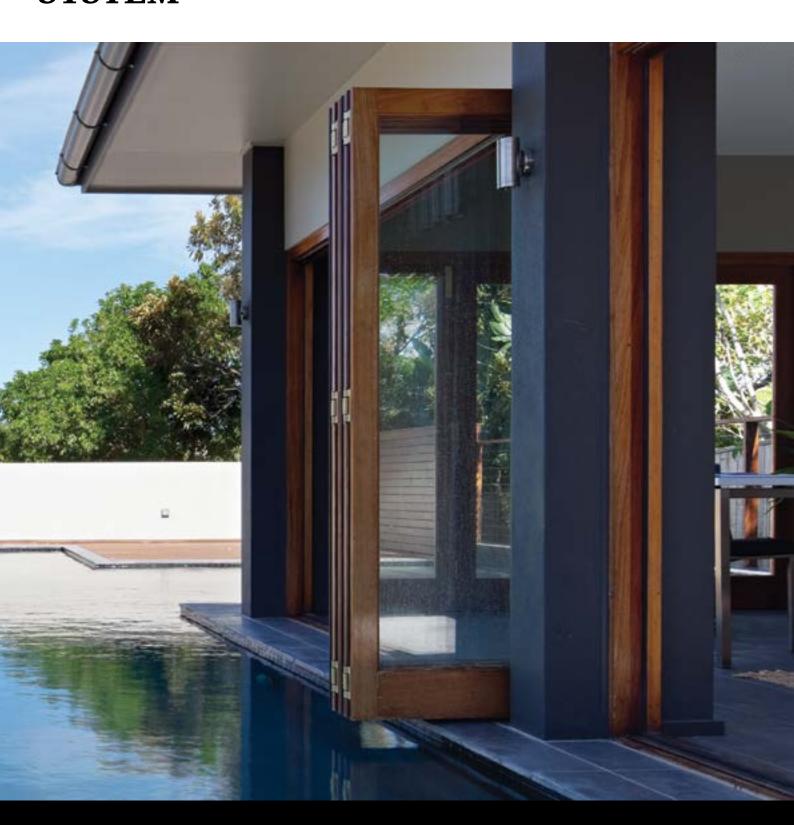

66

Enjoy open plan solutions with the space-creating system that started the bifold revolution

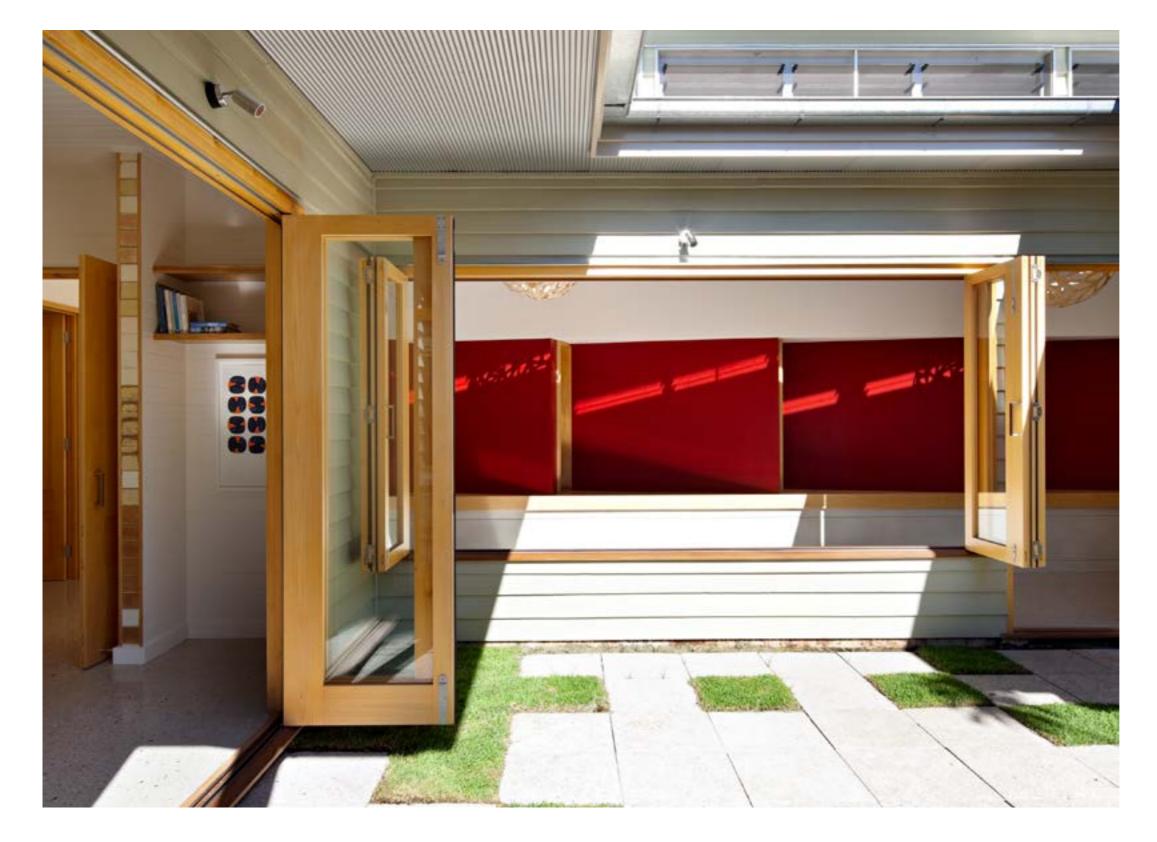

FLEXIBLY MANAGE SPACE

Functional and stylish, Centor's bifold door systems allow for flexibility and ease when dividing or opening space. The system that started the bifold revolution; E2 offers all the space-creating benefits of the larger E series in a refined — yet economical — package.

E2 is a bifold door hardware system for door panels up to a maximum of 60 kilograms. The doors are able to be opened either inward or outward, with odd or even numbers of panels in any configuration, leaving no interruptions from posts or fixed glass panels.

Available in an extensive range of finishes, including stainless steel, anosised aluminium and powdercoat, E2 is the smart choice for matching hardware to a range of residential and light commercial applications. Centor's lifestyle changing, folding systems will allow any residence or business to flexibly manage interior and exterior space with any situation that may appear.

E2 Specifications	
max opening width	16000mm
max panel weight	60kg
max panel height	3000mm
max panel width	1000mm
min panel thickness	35mm
max number of panels	16 (8 each way)



Open inward or out odd or even number of panels



Strong
Suits door panels
up to 60kg



Range of colours

Available in stainless steel,
PVD brass, anodised
aluminium and powdercoat

CENTOR-GRADE PERFORMANCE



Internal environment, operational function, durability; painstaking attention to detail and an unerring commitment to quality mean 'Centor-grade' performance, whatever the category. The result is a degree of control and comfort for the end-user that matches the easy flexibility of modern design.

Rain and Wind

Centor hardware was utilised in the first tracked bifolding door system to be certified under Australian Standard AS2047, which specifies the weather performance required of external windows and sliding doors. Doors utilising the heavier E4 system have since been certified to stringent Miami-Dade County hurricane standards, the toughest testing anywhere in the world. With similar technology built into E2, impressive water performance ratings are achievable from both outward and inward opening doors. Driving rain and howling gales can be shut out completely.

Air Infiltration

The E2 system achieves its superior rain and wind resistance in part from the way it allows the folding doors to close snugly against weatherseals. In the same way, doors using E2 effectively resist air infiltration to a level up to 50 times better than a sliding door.

Effortless operation

While E2's outstanding performance as part of a secure, weatherproof barrier is crucial, it's not until the doors are opened that the space-transforming benefits of the system truly come into play. For maximum enjoyment and use of the system, every effort has been made to ensure that doors glide open and slide shut with the minimum of effort – and that they continue to do so.

Quality Manufacture, Clever Design

E2 carriers, guides and pivots use stainless steel bearings custom machined to extremely fine tolerances on state-of-the-art German and Swiss machinery. Machined bearings are individually precision ground. A polypropylene floor channel lining adds to the smooth, almost silent rolling action which brings a smile to the face of the user.

Assembly and Installation

Comprehensive instructions are included and with quick-fix surface-mounted fittings, assembly and installation couldn't be easier.

Adjustment

E2 is designed to operate flawlessly well into the future with built-in adjustment mechanisms making the system tolerant of an imperfect world. SurelockTM, Centor's patented carrier pin locking system ensures that once heights are set they stay set. However, should door panels swell or a newly built structure settle over time, the end-user can easily make vertical and lateral adjustments simply using an allen key.

Collaborative Design Process

E2's thoughtful design doesn't achieve the highest performance in all categories on its own. It's in its element teamed with the quality products created by Centor's many manufacturing and custom fabricating clients.

The Centor technical department can assist in the design process for door sets incorporating the E2 system to ensure that the highest criteria for completed and installed doors are met even in the most unusual applications.

cyclic testing to a minimum of **50,000 CYCLES**

EXTENSIVE TESTING ENSURING YEARS OF TROUBLE-FREE USE



Proven Durability

In addition to extensive weather testing as part of complete door systems, all individual E2 components have been extensively laboratory tested, ensuring years of trouble-free use from hardware which ages with grace.

Cyclic Testing

E2 has undergone Centor's minimum requirement of cyclic testing to a grueling 50,000 cycles without failure at maximum configuration, however, many individual components are rated to over 100,000 cycles.

Corrosion Testing

Stainless steel, PVD brass, anodised aluminium and engineering-grade plastics are used throughout the E2 system with all materials carefully selected to maximise performance in any environment.

Centor conducts regular corrosion testing in a salt spray chamber, fixing hardware to various substrates to ensure that E2 will perform admirably even in the most exposed applications.

Structural Testing

Structural proof load tests up to 2500 Pa (52 psf) have been achieved by maximum size doors using the E2 system. E2 hardware components have been load tested to 3KN in accordance with AS/NZS1170.0.

Finite Element Analysis

Finite Element Analysis (FEA) is a computerised simulation technique where products are exposed to virtual operating environments and accurate predictions made in terms of load and deflection. Centor undertakes FEA in the design process to ensure the best balance of performance, cost and materials in every system.



E2 up close

Even a casual glance at the E2 system gives a strong impression of Centor's commitment to quality, but it's only upon closer inspection that the attention to detail really becomes apparent. Stacked with standard features and with an abundance of options to choose from, Centor E2 looks even better up close.

Materials and Finishes

E2 carriers, guides, pivots and hinges are available in brushed stainless steel, PVD brass finish over stainless steel, satin or gold anodised aluminium and powdercoated aluminium in black, white and custom colours. Head tracks and sills are produced in extruded aluminium with the option of satin or gold anodised or custom powdercoated finishes. The sills have a self draining option with timber trims. Floor guide channels are produced in aluminium with black polypropylene liner.

Panel Size and Materials

Centor's innovative hinge system enables the use of uniform width door panels regardless of the door configuration, ensuring maximum efficiency in door manufacture. Easily installed hardware can be teamed with door panels in timber, aluminium, PVC or fibreglass.

Design Features

A floating wall pivot is used to control door stile deflection and bowing on tall doors caused by wind loads or climatic conditions. Offset floor guides and floor pivots allow the guide channel to be concealed under the doors when they are closed. A straight guide option is also available. Top-rolling function means performance is never compromised by refuse in tracks.

Dropbolts

Easily installed with a dedicated router bit available from Centor, DH and DF dropbolts are available in a range of lengths and finishes to suit every E2 application. Available keyed and non-keyed, the clean-lined DH and DF dropbolts anchor doors firmly in the closed position and, together with the weather seals, eliminate rattling in strong winds.



HARDWARE CREATED FOR REAL LIFE SITUATIONS



If success in modern design can be measured by the degree of comfort and ease afforded to the end-user, then Centor E2 again rates highly. E2's superior function and performance goes a long way to creating a relaxed setting, while a range of other measures allow the system to be utilised with complete confidence.

Unparalleled Security

The E2 system responds to an increasingly security conscious market place with measures designed to ensure unwanted visitors are excluded – as well as the elements.

Specifying E2

For detailed component selection, including calculating size and number of door panels, specifiers can utilise Doorcalc, Centor's free specification and ordering software. Doorcalc is available from centor.com

Architects and designers can feel comfortable simply specifying 'Centor E2' and leaving detailed component selection to the builder, joiner or fabricator.

Warranty

In line with a commitment to the highest possible quality, Centor offers a 10-year warranty on E2 hardware.



Centor Folding

Based on the same functional geometry but with distinctive capacity and features, Centor's internal and external bifold range offers an alternative for every application. From the smallest folding window to four metre high walls of glass which fold away in seconds, Centor bifold systems create a formidable barrier against the elements, yet glide open with finger-tip ease.

EW and E2 are the mainstays of this flexible product range. Developed first and constantly upgraded since their inception they remain the perfect choice for the private residence or lighter commercial application. E2i is Centor's internal bifold system which has no sill or guide channel, allowing for seamless transitions between indoor spaces.

E3 and E4 are Centor's responses to the demands of architects and consumers wishing to expand the potential of bifold innovation into heavier-duty residential and commercial applications. E3 doubles the panel weight capacity of the E2 system, making even sturdier panel materials and double glazing possible.

The E4 system takes it even further with a massive 160kg panel weight capacity and substantially increased height, width and overall measurement specifications, ensuring that Centor bifold systems remain the perfect choice for every project.


Centor Screening


E2 is fully compatible with the ES2 Insect Door Screen, Centor's superbly effective, world-first integrated screening solution for bifold scale openings.

ARCHITECTURAL DETAIL


Downloadable DXF or DWG files ready for use in your own documentation are a convenient resource for architects and specifiers wishing to use Centor systems.

E2 DXF or DWG files can be downloaded from centor.com

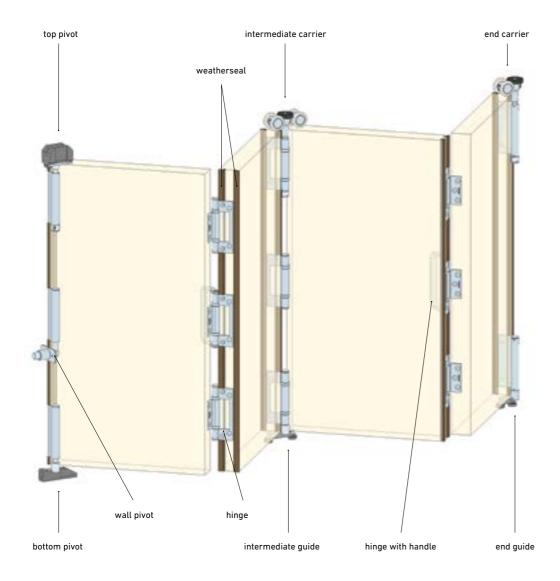



E2-001.DXF

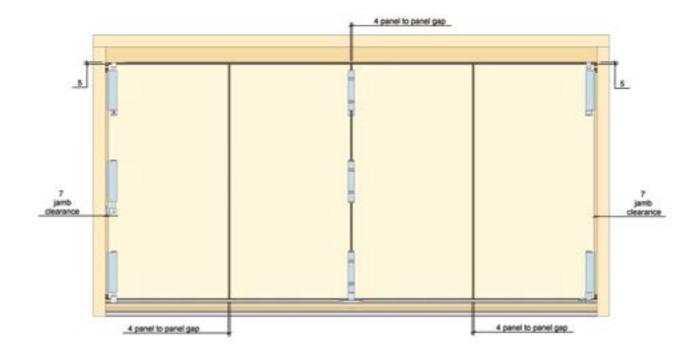


E2-002.DXF


13

ARCHITECTURAL DETAIL

Concealed Guide

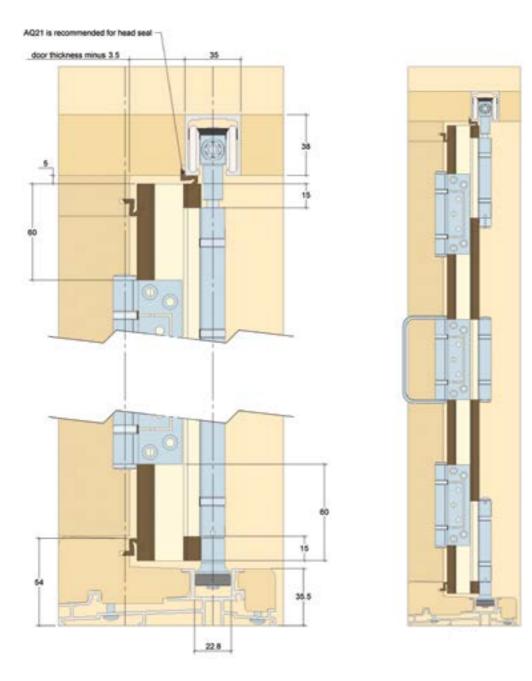

E2-004.DXF

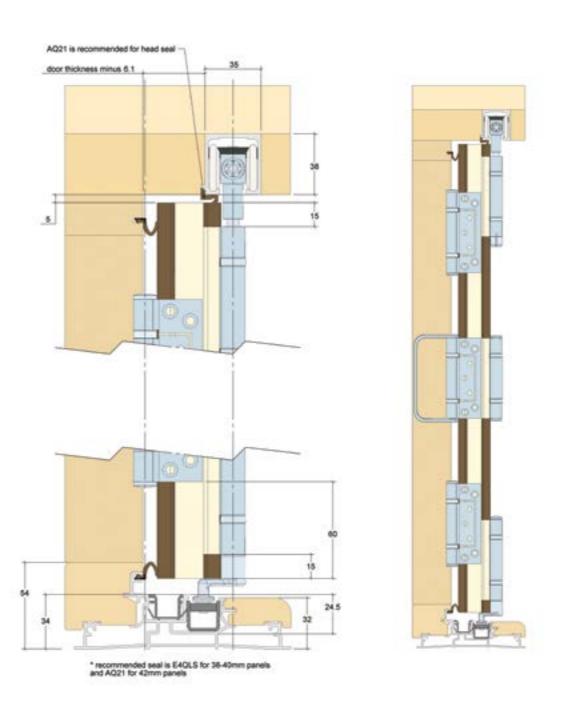

E2 is specified with 5 separate component groups. Components are required from each group to build an E2 folding door system.

- 1 Track choose surface finish and size required to suit opening
- 2 Sill Assembly choose a pre-assembled Centor sill with surface finish, floor guide type and size to suit opening or Channel choose material, surface finish, floor guide type and size of floor channel to suit opening
- 3 Door Hardware Sets choose surface finish, floor guide type and sets required to suit panel layout
- 4 Dropbolts choose surface finish, type, size & number required to suit panel layout
- 5 Weather Seals choose colour, type and amount of each seal required to suit opening size and panel layout

TRACK

PART	TRACK	PRODUCT CODE	DESCRIPTION
	aluminium track	14TA2N	2000mm aluminium track, natural anodised
		14TA2G	2000mm aluminium track, gold anodised
		14TA2PC	2000mm aluminium track, custom powdercoat
		14TA3N	3000mm aluminium track, natural anodised
		14TA3G	3000mm aluminium track, gold anodised
		14TA3PC	3000mm aluminium track, custom powdercoat
		14TA4N	4000mm aluminium track, natural anodised
		14TA4G	4000mm aluminium track, gold anodised
		14TA4PC	4000mm aluminium track, custom powdercoat
		14TA57N	5700mm aluminium track, natural anodised
		14TA57G	5700mm aluminium track, gold anodised
		14TA57PC	5700mm aluminium track, custom powdercoat
	aluminium track,	14TAM2N	2000mm machined track, natural anodised
	machined	14TAM3N	3000mm machined track, natural anodised
		14TAM4N	4000mm machined track, natural anodised
		14TAM57N	5700mm machined track, natural anodised

COMPONENT SELECTION

CHANNEL

PART		PRODUCT CODE	DESCRIPTION
	straight channel 26mm	E2FCA2N	2000mm 19 x 26mm aluminium channel, natural anodised
		E2FCA2G	2000mm 19 x 26mm aluminium channel, gold anodised
		E2FCA3N	3000mm 19 x 26mm aluminium channel, natural anodised
		E2FCA3G	3000mm 19 x 26mm aluminium channel, gold anodised
		E2FCA4N	4000mm 19 x 26mm aluminium channel, natural anodised
		E2FCA4G	4000mm 19 x 26mm aluminium channel gold anodised
		E2FCA57N	5700mm 19 x 26mm aluminium channel, natural anodised
		E2FCA57G	5700mm 19 x 26mm aluminium channel, gold anodised

UNDERDOOR GUIDE CHANNELS

PART	CHANNEL	PRODUCT CODE	DESCRIPTION
	concealed channel 24mm, retainer and poly channel	E22FCR4GP E22FCR4NP E22FCR57GP E22FCR57NP	4000mm floor channel retainer, gold anodised with poly channel 4000mm floor channel retainer, natural anodised with poly channel 5700mm floor channel retainer, gold anodised with poly channel 5700mm floor channel retainer, natural anodised with poly channel
	concealed channel 24mm, retainer	E22FCR4G E22FCR4N E22FCR57G E22FCR57N	4000mm floor channel retainer, gold anodised 4000mm floor channel retainer, natural anodised 5700mm floor channel retainer, gold anodised 5700mm floor channel retainer, natural anodised
	concealed channel 21mm, poly channel	E22FCP4 E22FCP57	4000mm floor channel, polypropylene 5700mm floor channel, polypropylene

LEFT CARRIER SET – STRAIGHT GUIDE*

PART	PRODUCT CODE	DESCRIPTION
	E22LCSS	left hand carrier set, stainless steel
ag III	E22LCSN	left hand carrier set, natural anodised
	E22LCSG	left hand carrier set, gold anodised
Fred.	E22LCSL	left hand carrier set, black powdercoat
60	E22LCSW	left hand carrier set, white powdercoat
	E22LCSPC	left hand carrier set, custom powdercoat
Ja	E22LCSTG	left hand carrier set, PVD brass
8	E22LCSSP	left hand carrier set, stainless polished

^{*}For use on doorsets with fast-fix hinges

LEFT CARRIER SET - CONCEALED GUIDE*

PART	PRODUCT CODE	DESCRIPTION
	E2CLCSS	concealed left hand carrier set, stainless steel
(b)	E2CLCSN	concealed left hand carrier set, natural anodised
	E2CLCSG	concealed left hand carrier set, gold anodised
Blog	E2CLCSL	concealed left hand carrier set, black powdercoat
file	E2CLCSW	concealed left hand carrier set, white powdercoat
	E2CLCSTG	concealed left hand carrier set, PVD brass
Liel E	E2CLCSSP	concealed Left hand carrier set, stainless polished
40		

^{*}For use on doorsets with fast-fix hinges

REBATED LEFT CARRIER SETS - STRAIGHT GUIDE*

PART	PRODUCT CODE	DESCRIPTION
•	E22RLCSS	rebated left hand carrier set, stainless steel
60	E22RLCSTG	rebated left hand carrier set, PVD brass
	E22RLCSSP	rebated left hand carrier set, stainless polished

^{*}For use on rebated doorsets with fast-fix hinges

COMPONENT SELECTION

REBATED LEFT CARRIER SETS - CONCEALED GUIDE*

PART	PRODUCT CODE	DESCRIPTION
68	E2CRLCSS	concealed rebated left hand carrier set, stainless steel
	E2CRLCSTG	concealed rebated left hand carrier set, PVD brass
	E2CRLCSSP	concealed rebated left hand carrier set, stainless polished
A ₄₁		
11		
8		

^{*}For use on rebated doorsets with fast-fix hinges

RIGHT CARRIER SET - STRAIGHT GUIDE*

PART	PRODUCT CODE	DESCRIPTION
	E22RCSS	right hand carrier set, stainless steel
60	E22RCSN	right hand carrier set, natural anodised
	E22RCSG	right hand carrier set, gold anodised
9	E22RCSL	right hand carrier set, black powdercoat
	E22RCSW	right hand carrier set, white powdercoat
-	E22RCSPC	right hand carrier set, custom powdercoat
4	E22RCSTG	right hand carrier set, PVD brass
3	E22RCSSP	right hand carrier set, stainless polished

^{*}For use on doorsets with fast-fix hinges

RIGHT CARRIER SET - CONCEALED GUIDE*

PART	PRODUCT CODE	DESCRIPTION
	E2CRCSS	concealed right hand carrier set, stainless steel
_	E2CRCSN	concealed right hand carrier set, natural anodised
90	E2CRCSG	concealed right hand carrier set, gold anodised
	E2CRCSL	concealed right hand carrier set, black powdercoat
	E2CRCSW	concealed right hand carrier set, white powdercoat
-	E2CRCSTG	concealed right hand carrier set, PVD brass
19	E2CRCSSP	concealed right hand carrier set, stainless polished
5		

^{*}For use on doorsets with fast-fix hinges

REBATED RIGHT CARRIER SETS - STRAIGHT GUIDE*

PRODUCT CODE	DESCRIPTION
E22RRCSS	rebated right hand carrier set, stainless steel
E22RRCSTG	rebated right hand carrier set, PVD brass
E22RRCSSP	rebated right hand carrier set, stainless polished
	E22RRCSTG

^{*}For use on rebated doorsets with fast-fix hinges

REBATED RIGHT CARRIER SETS - CONCEALED GUIDE*

PART	PRODUCT CODE	DESCRIPTION
	E2CRRCSS	concealed rebated right hand carrier set, stainless steel
	E2CRRCSTG	concealed rebated right hand carrier set, PVD brass
10	E2CRRCSSP	concealed rebated right hand carrier set, stainless polished
6		
P		
,		
and the same		

^{*}For use on rebated doorsets with fast-fix hinges

COMPONENT SELECTION

INTERMEDIATE CARRIER SETS - STRAIGHT GUIDE

PART	PRODUCT CODE	DESCRIPTION
Fast-fix	E22ICSS	intermediate carrier set, stainless steel
600	E22ICSN	intermediate carrier set, natural anodised
189	E22ICSG	intermediate carrier set, gold anodised
	E22ICSL	intermediate carrier set, black powdercoat
BH .	E22ICSW	intermediate carrier set, white powdercoat
	E22ICSPC	intermediate carrier set, custom powdercoat
-64	E22ICSTG	intermediate carrier set, PVD brass
2000	E22ICSSP	intermediate carrier set, stainless polished

INTERMEDIATE CARRIER SETS - CONCEALED GUIDE

PART	PRODUCT CODE	DESCRIPTION
Fast-fix	E2CICSS	concealed intermediate carrier set, stainless steel
900	E2CICSN	concealed intermediate carrier set, natural anodised
100	E2CICSG	concealed intermediate carrier set, gold anodised
2	E2CICSL	concealed intermediate carrier set, black powdercoat
Disp	E2CICSW	concealed intermediate carrier set, white powdercoat
1	E2CICSTG	concealed intermediate carrier set, PVD brass
500	E2CICSSP	concealed intermediate carrier set, stainless polished
W. S.		

MEETING CARRIER SET - STRAIGHT GUIDE*

PART	PRODUCT CODE	DESCRIPTION
	E22MCSS	meeting carrier set, stainless steel
00 00	E22MCSN	meeting carrier set, natural anodised
15-11	E22MCSG	meeting carrier set, gold anodised
	E22MCSL	meeting carrier set, black powdercoat
B- 4	E22MCSW	meeting carrier set, white powdercoat
ng.n	E22MCSPC	meeting carrier set, custom powdercoat
La	E22MCSTG	meeting carrier set, PVD brass
Fr. A	E2MCSSP	meeting carrier set, stainless polished
(1000) (1000)		

^{*}Use with doorsets with fast-fix hinges

MEETING CARRIER SET – CONCEALED GUIDE*

PART	PRODUCT CODE	DESCRIPTION
	E2CMCSS	concealed meeting carrier set, stainless steel
00 00	E2CMCSN	concealed meeting carrier set, natural anodised
Up H	E2CMCSG	concealed meeting carrier set, gold anodised
	E2CMCSL	concealed meeting carrier set, black powdercoat
8- 8	E2CMCSW	concealed meeting carrier set, white powdercoat
nem	E2CMCSTG	concealed meeting carrier set, PVD brass
	E2CMCSSP	concealed meeting carrier set, stainless polished

^{*}Use with doorsets with fast-fix hinges

PIVOT SET - STRAIGHT GUIDE*

PART	PRODUCT CODE	DESCRIPTION
	E22PSS	pivot set, stainless steel
	E22PSN	pivot set, natural anodised
	E22PSG	pivot set, gold anodised
4	E22PSL	pivot set, black powdercoat
Date:	E22PSW	pivot set, white powdercoat
	E22PSPC	pivot set, custom powdercoat
0	E22PSTG	pivot set, PVD brass
O.	E22PSSP	pivot set, stainless polished

^{*}For use on doorsets with fast-fix hinges

PIVOT SET - CONCEALED GUIDE*

PART	PRODUCT CODE	DESCRIPTION
	E2CPSS	concealed pivot set, stainless steel
Q.P.	E2CPSN	concealed pivot set, natural anodised
	E2CPSG	concealed pivot set, gold anodised
4	E2CPSL	concealed pivot set, black powdercoat
RIN	E2CPSW	concealed pivot set, white powdercoat
	E2CPSTG	concealed pivot set, PVD brass
	E2CPSSP	concealed pivot set, stainless polished

^{*}For use on doorsets with fast-fix hinges

COMPONENT SELECTION

HINGE SETS – FAST-FIX

PART	PRODUCT CODE	DESCRIPTION
with handle	E22HSS	hinge set, stainless steel
95	E22HSNN	hinge set, natural anodised, natural anodised handle
13	E22HSNL	hinge set, natural anodised, black powdercoat handle
23	E22HSGG	hinge set, gold anodised, gold anodised handle
(Tab	E22HSLL	hinge set, black powdercoat, black powdercoat handle
	E22HSWW	hinge set, white powdercoat, white powdercoat handle
0.0	E22HSWL	hinge set, white powdercoat, black powdercoat handle
4	E22HSTG	hinge set, PVD brass
-3	E22HSSP	hinge set, stainless polished
with no handle	E22HNHSS	no handle hinge set, stainless steel
9.	E22HNHSN	no handle hinge set, natural anodised
1	E22HNHSG	no handle hinge set, gold anodised
33	E22HNHSL	no handle hinge set, black powdercoat
Bo	E22HNHSW	no handle hinge set, white powdercoat
STEEL ST.	E22HNHSPC	no handle hinge set, custom powdercoat
03	E22HNHSTG	no handle hinge set, PVD brass
	E22HNHSSP	no handle hinge set, stainless polished

HALF OFFSET HINGE SETS – FAST-FIX

PART	PRODUCT CODE	DESCRIPTION
with handle	E22HHSS	half offset hinge set, stainless steel
133	E22HHSN	half offset hinge set, natural anodised
	E22HHSG	half offset hinge set, gold anodised
04	E22HHSL	half offset hinge set, black powdercoat
H	E22HHSW	half offset hinge set, white powdercoat
	E22HHSPC	half offset hinge set, custom powdercoat
Dist	E22HHSTG	half offset hinge set, PVD brass
	E22HHSSP	half offset hinge set, stainless polished
with no handle	E22HHNHSS	no handle half offset hinge set, stainless steel
DES	E22HHNHSN	no handle half offset hinge set, natural anodised
	E22HHNHSG	no handle half offset hinge set, gold anodised
	E22HHNHSL	no handle half offset hinge set, black powdercoat
46	E22HHNHSW	no handle half offset hinge set, white powdercoat
100	E22HHNHSPC	no handle half offset hinge set, custom powdercoat
UAS	E22HHNHSTG	no handle half offset hinge set, PVD brass
and the second	E22HHNHSSP	no handle half offset hinge set, stainless polished

ECLIPSE SILL

PART	PRODUCT CODE	DESCRIPTION
	E2IS4N	4000mm inward sill, natural anodised
	E2IS6N	6000mm inward sill, bronze anodised
	E2IS2NT	2000mm inward sill, natural anodised and timber
	E2IS3NT	3000mm inward sill, natural anodised and timber
3	E2IS4NT	4000mm inward sill, natural anodised and timber
	E2IS6NT	6000mm inward sill, natural anodised and timber

COMPONENT SELECTION

SILL - OUTWARD E2/E3 SILL WITH TIMBER

PART	PRODUCT CODE	DESCRIPTION
droptoti channel position	E2CS30NKWL E2CS42NKWL	3000mm concealed sill with timber, natural anodised with kwila 4200mm concealed sill with timber, natural anodised with kwila
dropboit channel position	E2CS48NKWL E2CS57NKWL	4800mm concealed sill with timber, natural anodised with kwila 5700mm concealed sill with timber, natural anodised with kwila

a) assembly for 38mm doors

SILL - INWARD E2/E3 SILL WITH TIMBER

PART	PRODUCT CODE	DESCRIPTION
	E2CIS57NKWL	E2/E3 5700mm concealed external inward sill, natural anodised with kwila

SILL - E2/E3 CONCEALED NARROW SILL

PART	PRODUCT CODE	DESCRIPTION
	E2CNS4N	E2/E3 4000mm concealed narrow sill, natural anodised
3	E2CNS6N	E2/E3 6000mm concealed narrow sill, natural anodised

b) assembly for 40mm doors (dropbolt channel reversed)

WALL PIVOT SETS. CAN BE FITTED MIDWAY BETWEEN TOP AND BOTTOM PIVOT TO REDUCE PANEL DEFLECTION.

PART	PRODUCT CODE	DESCRIPTION
	E22WPSS	wall pivot set, stainless steel
Dores .	E22WPSW	wall pivot set, white powdercoat
800	E22WPSTG	wall pivot set, PVD brass
	E22WPSG	wall pivot set, gold anodised
100	E22WPSL	wall pivot set, black powdercoat
200	E22WPSN	wall pivot set, natural anodised
0-3	E22WPSSP	wall pivot set, stainless polished

EXTERNAL HANDLES

PART	PRODUCT CODE	DESCRIPTION
	E22EHS	external handle, stainless
	E22EHN	external handle, natural anodised
PI	E22EHG	external handle, gold anodised
Ť	E22EHL	external handle, black powdercoat
	E22EHW	external handle, white powdercoat
	E22EHPC	external handle, custom powdercoat
	E22EHSP	external handle, stainless polished
	E22EHTG	external handle, PVD Brass

INTERNAL HANDLE

PART	PARTS ON PANELS	PRODUCT CODE	DESCRIPTION
	0	DF1IPH	internal pull handle, stainless steel

SINGLE HINGE

PART	PRODUCT CODE	DESCRIPTION
	E22HS	hinge with handle, stainless steel
	E22HNHS	hinge no handle, stainless steel
	E22HHNHS	half off set hinge no handle, stainless steel
	E22HHSHS	half off set hinge with handle, stainless steel

DOOR SIZE CALCULATION

To calculate the dimensions of the doors or openings we strongly recommend using Centor's "Doorcalc" program, which is a Microsoft" Excel spreadsheet. To manually calculate door sizing for an opening, follow the following steps:

- 1 Prepare a basic sketch of your door opening (see worked example), to visualize clearances and check sizes.
- 2 The calculation is based on all panels being equal width, using half-offset hinges (Patent Pending). Note that the allowance between each panel is 4mm although hinge thickness is less this allowance has been determined by consultation with fabricators as the best approximation for calculation. Clearance between hinges and hinge pins, coupled with the pressure from compression seals accounts for the allowance being larger than the nominal hinge flap thickness.
- 3 Recommended clearances are as follows:

- Jamb to panel (door closed) 7 mm
- Panel to panel (door closed) 4 mm
- Top of panel to head 5 mm

Bottom of panel to sill
 5 mm for straight guides

10mm for concealed guides

4 Panel width W
Opening width L
Total number of panels N

Panel width is:


Worked Examples


Clear opening size 2425 high x 4200 wide (L), and a $3L \times 2R$ arrangement.

Check against your door layout:

The panel height is the opening height less the nominal top and bottom clearances:

Panel Height H = 2425 - 5 - 10 = 2410mm





Concealed Guides


COMMON PANEL LAYOUTS

HARDWARE LEGEND			
PS	pivot set	HHS	half offset hinge set
WPS	wall pivot set	HS	hinge set (flat)
ICS	intermediate carrier set	EH	external handle
LCS	left carrier set	DB	dropbolt
RCS	right carrier set		

LEGEND	
Passage set Handles / Lock sets refer to Centor Door Furniture at www.centor.com.au	
Dropbolts top and bottom	

Note> Wall Pivot Set recommended for doors over 2250mm in height.

FLOATING DOOR PAIRS




Per pair of doors


1 x left carrier set

- 1 x right carrier set 1 x hinge set
- 2 x dropbolt

HARDWARE APPLICATION (3L2R)

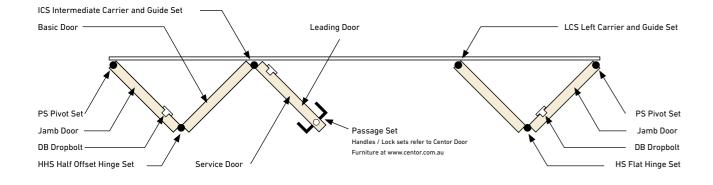


OUTWARD APPLICATION EXTERIOR HANDLE OPTION



Use one exterior handle on exit door (outward system) where passage set / lock not required. Use dropbolts top and bottom to lock door from the inside only.

Note> Exit door not accessible from exterior in this application.

NIMARD ARRIGATION EXTERIOR HANDLE ORTIO



Use one exterior handle on each pair of doors (inward system) to pull open and close doors

COMMON PANEL LAYOUTS

CODE	OPENING CONFIGURATION	HARDWARE
2L	inside WPS, PS not accessible from exterior outside RCS	1 x pivot set 1 x wall pivot set* 1 x right carrier set 1 x hinge set 2 x dropbolt
2L1R	inside WPS, PS WPS, PS outside RCS	2 x pivot set 2 x wall pivot set* 1 x right carrier set 1 x hinge set 2 x dropbolt
3L	inside WPS, PS ICS outside HHS	1 x pivot set 1 x wall pivot set* 1 x intermediate carrier set 1 x half offset hinge set 2 x dropbolt
3L1R	inside WPS, PS ICS WPS, PS outside	2 x pivot set 2 x wall pivot set* 1 x intermediate carrier set 1 x half offset hinge set 4 x dropbolt
4L	inside WPS, PS ICS RCS not accessible from exterior outside HHS HHS	1 x pivot set 1 x wall pivot set* 1 x intermediate carrier set 1 x right carrier set 2 x half offset hinge set 4 x dropbolt
4L1R	inside WPS, PS ICS WPS, PS outside RCS	2 x pivot set 2 x wall pivot set* 1 x intermediate carrier set 1 x right carrier set 2 x half offset hinge set 4 x dropbolt
3L2R	inside WPS, PS ICS WPS, PS outside LCS HHS HS	2 x pivot set 2 x wall pivot set* 1 x intermediate carrier set 1 x left carrier set 1 x hinge set 1 x half offset hinge set 4 x dropbolt
5L	inside WPS, PS ICS ICS outside HHS HS	1 x pivot set 1 x wall pivot set* 2 x intermediate carrier set 1 x hinge set 1 x half offset hinge set 4 x dropbolt
3L3R	inside WPS, PS ICS ICS WPS, PS outside may be reversed HHS	2 x pivot set 2 x wall pivot set* 2 x intermediate carrier set 2 x half offset hinge set 6 x dropbolt
7L	inside WPS, PS ICS ICS ICS outside HHS HS HS	1 x pivot set 1 x wall pivot set* 3 x intermediate carrier set 2 x hinge set 1 x half offset hinge set 6 x dropbolt
4L3R	inside WPS, PS ICS RCS ICS WPS, PS outside HHS HHS HHS	2 x pivot set 2 x wall pivot set* 2 x intermediate carrier set 1 x right carrier set 3 x half offset hinge set 6 x dropbolt
5L2R	inside WPS, PS ICS ICS RCS WPS, PS outside HHS HS HS	2 x pivot set 2 x wall pivot set* 2 x intermediate carrier set 1 x left carrier set 2 x hinge set 1 x half offset hinge set 6 x dropbolt
5L3R	inside WPS, PS ICS ICS ICS WPS, PS outside HHS HHS HHS	2 x pivot set 2 x wall pivot set* 3 x intermediate carrier set 1 x hinge set 2 x half offset hinge set 8 x dropbolt

^{*} Wall Pivot Sets required for doors over 2250mm


COMMON PANEL LAYOUTS


CODE	OPENING CONFIGURATION	HARDWARE
2R	outside PS, WPS not accessible from exterior HS	1 x pivot set 1 x wall pivot set* 1 x left carrier set 1 x hinge set 2 x dropbolt
1L2R	inside WPS, PS WPS, PS outside LCS HS	2 x pivot set 2 x wall pivot set* 1 x left carrier set 1 x hinge set 2 x dropbolt
3R	inside ICS WPS, PS outside HHS	1 x pivot set 1 x wall pivot set* 1 x intermediate carrier set 1 x half offset hinge set 2 x dropbolt
1L3R	inside WPS, PS ICS WPS, PS outside HHS	2 x pivot set 2 x wall pivot set* 1 x intermediate carrier set 1 x half offset hinge set 4 x dropbolt
2L2R	inside WPS, PS RCS LCS WPS, PS not accessible from exterior outside HS HS	2 x pivot set 2 x wall pivot set* 1 x right carrier set 1 x left carrier set 2 x hinge set 4 x dropbolt
1L4R	outside WPS, PS LCS ICS WPS, PS HHS HHS	2 x pivot set 2 x wall pivot set* 1 x intermediate carrier set 1 x left carrier set 2 x half offset hinge set 4 x dropbolt
4R	inside LCS ICS WPS, PS outside HHS HHS	1 x pivot set 1 x wall pivot set* 1 x intermediate carrier set 1 x left carrier set 2 x half offset hinge set 4 x dropbolt
2L3R	inside WPS, PS RCS ICS WPS, PS outside HS HHS	2 x pivot set 2 x wall pivot set* 1 x intermediate carrier set 1 x right carrier set 1 x hinge set 1 x half offset hinge set 4 x dropbolt
5R	outside ICS ICS WPS, PS HS HHS	1 x pivot set 1 x wall pivot set* 2 x intermediate carrier set 1 x hinge set 1 x half offset hinge set 4 x dropbolt
3L4R	inside WPS, PS ICS LCS ICS WPS, PS outside HHS HHS HHS	2 x pivot set 2 x wall pivot set* 2 x intermediate carrier set 1 x left carrier set 3 x half offset hinge set 6 x dropbolt
7R	inside ICS ICS ICS WPS, PS outside	1 x pivot set 1 x wall pivot set* 3 x intermediate carrier set 2 x hinge set 1 x half offset hinge set 6 x dropbolt
2L5R	inside WPS, PS RCS ICS ICS WPS, PS outside HS HS HHS	2 x pivot set 2 x wall pivot set* 2 x intermediate carrier set 1 x right carrier set 2 x hinge set 1 x half offset hinge set 6 x dropbolt
8R	inside outside	1 x pivot set 1 x wall pivot set* 3 x intermediate carrier set 1 x left carrier set 2 x hinge set 2 x half offset hinge set 8 x dropbolt

^{*} Wall Pivot Sets required for doors over 2250mm


SURELOCK ADJUSTMENT™

Centor's upgraded Surelock™ technology (Surelock 5) ensures folding doors running on E2 and E3 harware can be adjusted simply with an 8mm Allan key.

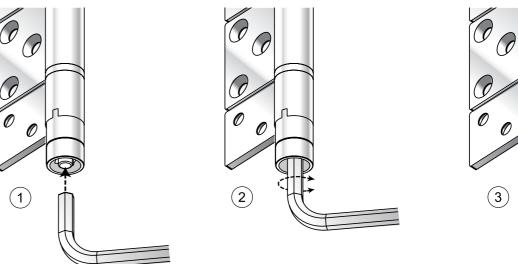



31



Patents Apply

Centor Australia Pty Ltd

1300 CENTOR (1300 236 867) +61 7 3868 5777 mail@centor.com.au centor.com

